




TOOLMASTER

5MT Live Centre

Taiwanese Precision Quality



TOOLMASTER 5MT Live Centre



Work Piece Load Graph



Side View



Rear View



Wooden Case

Description


Toolmaster live centre's are fitted with needle, thrust and ball bearings suitable for medium to high speed lathes with heavy loads.

The shaft is made from alloy steel heat treated to HRC 60° providing high rigidity and high durability.

Features

- Maximum speed 2000rpm @ 400kg
- Maximum load 1065kg @ 70rpm
- Hardened to HRC 60°
- Made from alloy steel
- Assembled with thrust, needle & ball bearings

Specifications

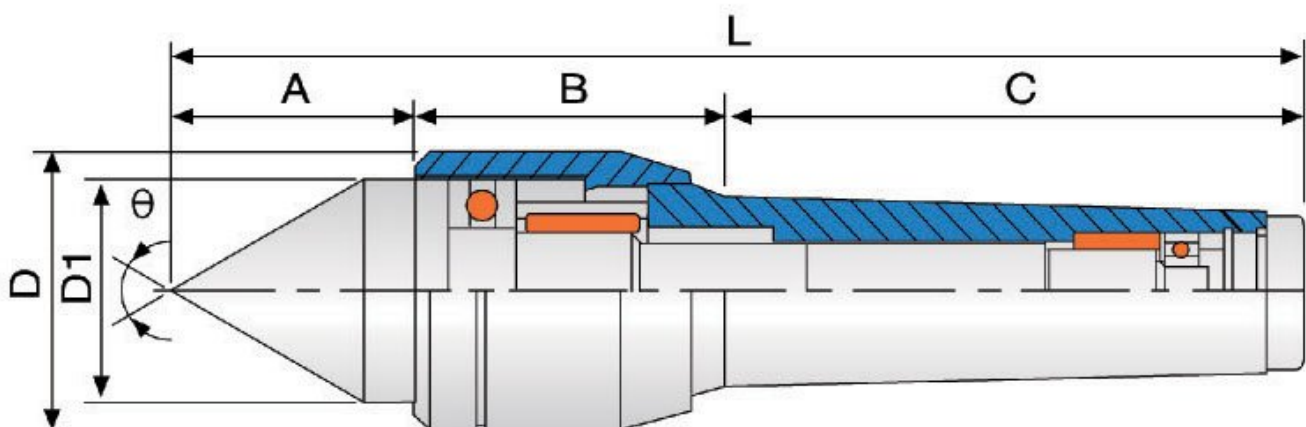

ORDER CODE	C060
Taper (MT)	5MT
Point Type	Standard
Maximum Speed (rpm)	2000

TOOLMASTER 5MT Live Centre

Maximum Load Capacity (kg)	1065
Angle θ (deg)	60
A (mm)	54
B (mm)	72
C	136
D	65
D1	52
d	~
E (mm)	~
F (mm)	~
G (mm)	~
L (mm)	262
Nett Weight (kg)	3.7