

TOOLMASTER



4MT Live Centre Hi-Speed



TOOLMASTER 4MT Live Centre Hi-Speed


Description

Toolmaster live centre's are fitted with needle, thrust and ball bearings suitable for high speed CNC turning with medium to heavy loads.
The shaft is made from alloy steel heat treated to HRC 60° providing high rigidity and high durability.

Features

- 60° Standard point Angle
- Maximum speed 4000rpm
- Maximum load 1300kg
- Accuracy 0.005mm

Specifications

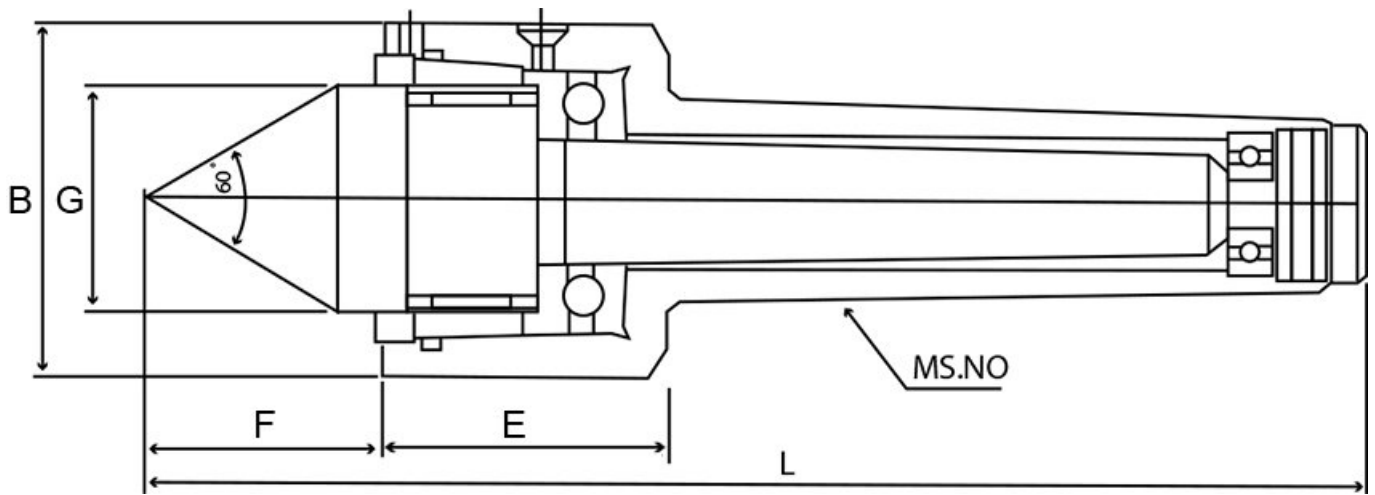

ORDER CODE	C0741
Taper (MT)	4MT
Point Type	Standard
Maximum Speed (rpm)	4000
Maximum Load Capacity (kg)	1300
Angle θ (deg)	~
A (mm)	~
B (mm)	55
C	~
D	~
D1	~
d	~
E (mm)	46
F (mm)	43
G (mm)	35
L (mm)	198

TOOLMASTER 4MT Live Centre Hi-Speed

Nett Weight (kg)	1.37
-------------------------	------
