

TOOLMASTER



5MT Live Centre Hi-Speed



TOOLMASTER 5MT Live Centre Hi-Speed


Description

Toolmaster live centre's are fitted with needle, thrust and ball bearings suitable for high speed CNC turning with medium to heavy loads. The shaft is made from alloy steel heat treated to HRC 60° providing high rigidity and high durability.

Features

- 60° Standard point Angle
- Maximum speed 3000rpm
- Maximum load 2000kg
- Accuracy 0.005mm

Specifications

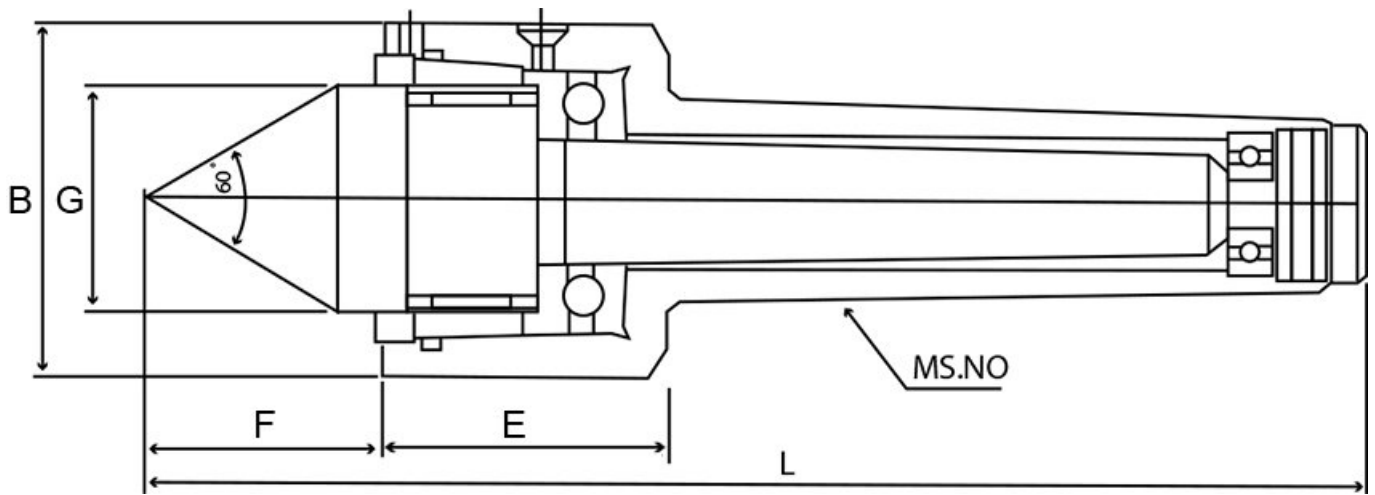

ORDER CODE	C0751
Taper (MT)	5MT
Point Type	Standard
Maximum Speed (rpm)	3000
Maximum Load Capacity (kg)	2000
Angle θ (deg)	~
A (mm)	~
B (mm)	70
C	~
D	~
D1	~
d	~
E (mm)	54
F (mm)	55
G (mm)	45
L (mm)	240

TOOLMASTER 5MT Live Centre Hi-Speed

Nett Weight (kg)	3.03
-------------------------	------
