

SKODA



5MT Live Centre Extended Point



SKODA 5MT Live Centre Extended Point


Description

Extended with 60° Point Angle:

Features

- Designed with a maximum run-out tolerance of 0.0035mm
- Can be used for all lathe and grinding applications
- An adjustable front radial bearing allows for elimination of excessive run out
- The design features a small-diameter body which allows for closer access to the work piece
- Morse tapers are to standards DIN 228 and ISO 296

Specifications

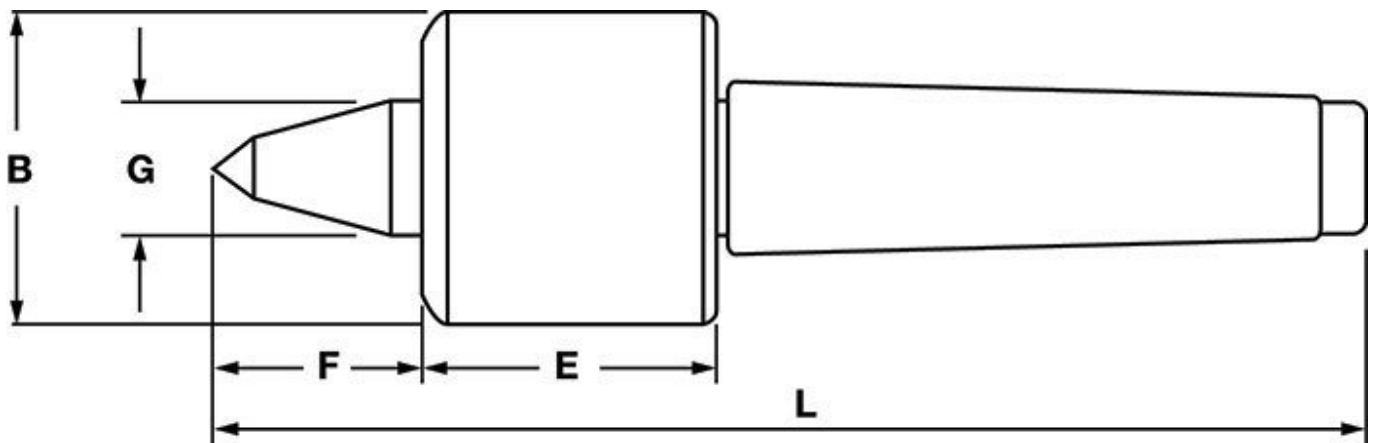

ORDER CODE	C082
Taper (MT)	5MT
Point Type	Extended
Maximum Speed (rpm)	3500
Maximum Load Capacity (kg)	1600
Angle θ (deg)	~
A (mm)	~
B (mm)	69.5
C	~
D	~
D1	~
d	~
E (mm)	~
F (mm)	~
G (mm)	~
L (mm)	259
Nett Weight (kg)	3.2