


TOOLMASTER



2MT Live Centre Set - Interchangeable Centring Tips



TOOLMASTER 2MT Live Centre Set - Interchangeable Centring Tips



Work Piece Load Graph



Tips



Live Centre



Live Centre Side View



Live Centre Rear View



Wooden Case

Description

Toolmaster live centre sets are fitted with needle thrust and ball bearings suitable for medium to high speed lathes with heavy loads. The shaft is made from alloy steel heat treated to HRC 60° providing high rigidity and high durability.

Features


- Maximum Speed: 5000rpm @ 40kg
- Maximum Load: 200kg @ 100rpm
- Hardened to HRC 60°
- Made from alloy steel
- Assembled with thrust, needle & ball bearings
- 7 x interchangeable centre tips

Includes

- Interchangeable centre tips:
- 2 x Standard - Ø12.6mm
- 1 x Extended point - Ø6mm
- 1 x Extended point - Ø8mm
- 1 x Extended point - Ø10mm
- 1 x Female cone - Ø6mm
- 1 x Pipe - Ø11 ~ Ø32mm

TOOLMASTER 2MT Live Centre Set - Interchangeable Centring Tips

Specifications

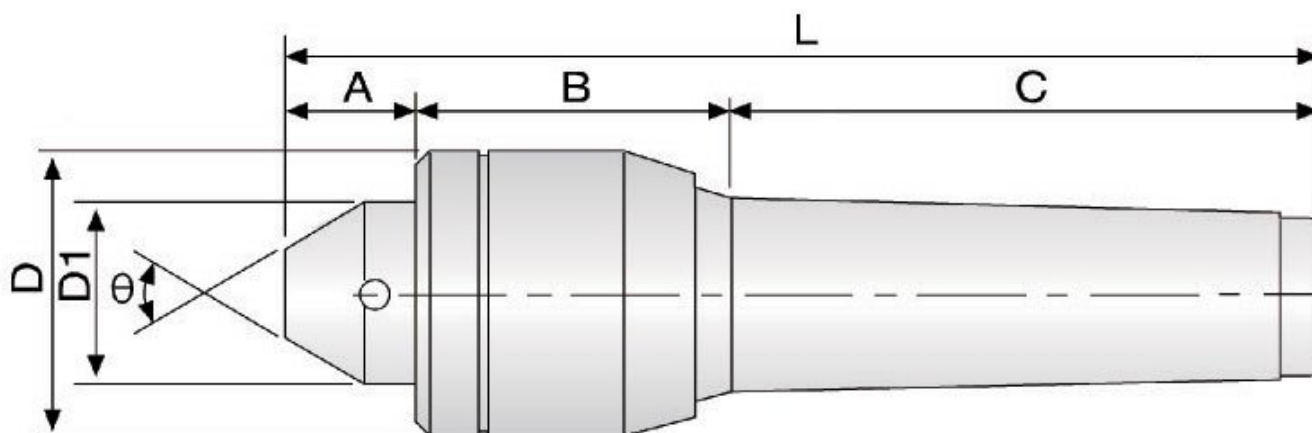

ORDER CODE	C0625
Taper (MT)	2MT
Maximum Speed (rpm)	5000
Maximum Load Capacity (kg)	200
θ Angle	60
A	22
B	36
C	69
D	32
D1	25
L	127
Nett Weight (kg)	0.9