

VERTEX CS-6



Vertex Super Indexing Head

130mm Centre Height



VERTEX Vertex Super Indexing Head CS-6

Description

Manufactured in Taiwan


Features

- The Vertex Super Spacer is designed to be used on milling, drilling or any machine where an indexing facility is required
- Combines the advantages of super indexing with the flexibility of worm gear movement
- The 3-jaw chucks on both the 6" and 8" models have large through-bores
- Can be used in either vertical or horizontal plane
- Master indexing plate has 24 divisions and is permanently fixed inside the indexer. Divisions of 2, 3, 4, 6, 8 & 12 can also be achieved by using sub plates. These can be installed quickly in the bottom of the indexer
- When the chuck is removed, the unit can be used as a horizontal or vertical rotary table
- The worm gear has a ratio of 90:1. It can be dis-engaged for quick indexing work
- Worm is hardened and precision ground to minimise wear
- The operating collar is graduated in one minute increments and readings down to ten seconds can be set on the vernier scale
- The unit can be fitted with dividing plates

Includes

- 3-Jaw Self-Centring Chuck
- Face Plate
- 6 indexing plates

Specifications

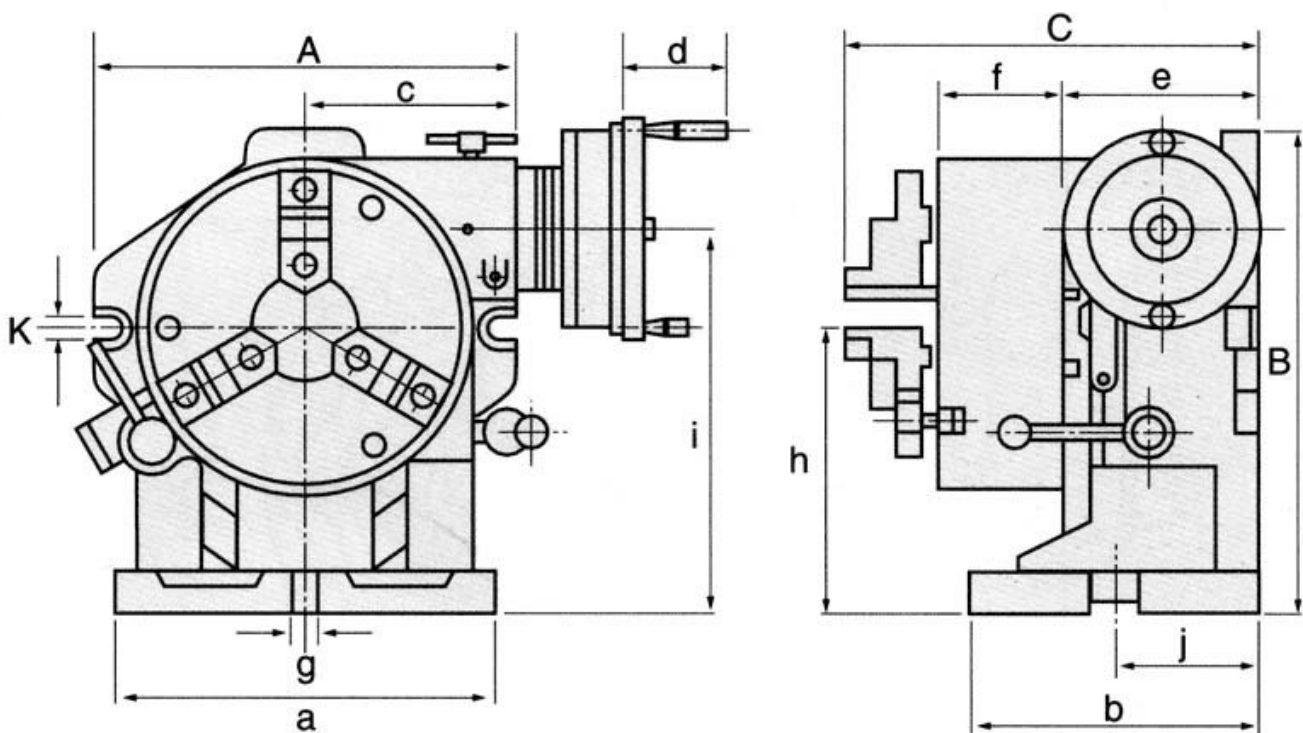

VERTEX Vertex Super Indexing Head CS-6

ORDER CODE

VERTEX Vertex Super Indexing Head CS-6

R002

MODEL	CS-6
3 Jaw Chuck Size (mm)	Ø152
Bore (mm)	Ø40
A (mm)	250
B (mm)	235
C (mm)	221
a (mm)	220
b (mm)	150
c (mm)	184
d (mm)	82
e (mm)	112
f (mm)	66
g (mm)	16
h (mm)	130
i (mm)	186
j (mm)	80
K (mm)	18
Nett Weight (kg)	48